


SAMIFLEX SPACER COUPLING - TYPE DO

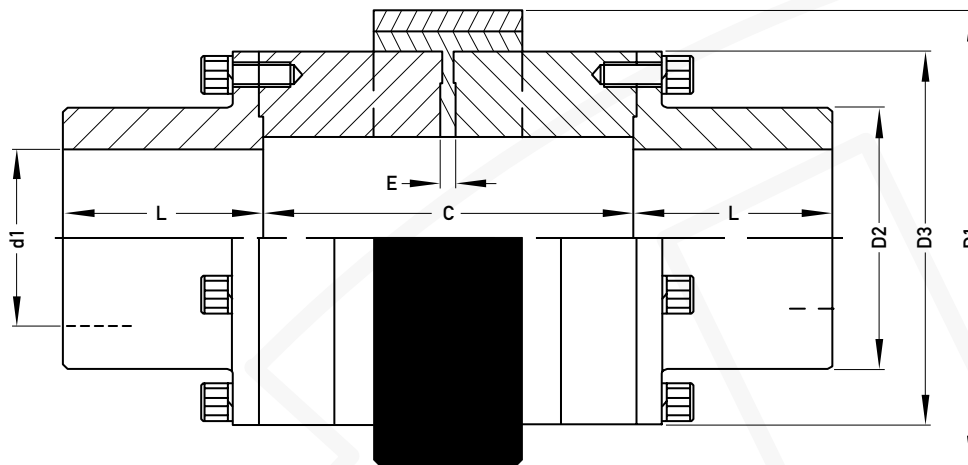

Coupling Size	Maximum KW per 1000 RPM STD Insert	Max Bore (d1)	Max RPM	Dimensions							
				D1	D2	D3	L	C (D.B.S.E.)			
A2D	26	42	4100	111	60	86	60	100	120	140	
A3D	52	60	4100	144	88	116	70	100	120	140	180
A4D	104	80	3600	182	110	150	85	120	140	180	
A45D	184	90	3100	202	125	170	95	120	140	180	

Note - The Samiflex Drop Out Spacer (Type DO) is interchangeable with many competitive Drop-out couplings - Consult Autogard