



SAMIFLEX SPACER COUPLING - TYPE DO

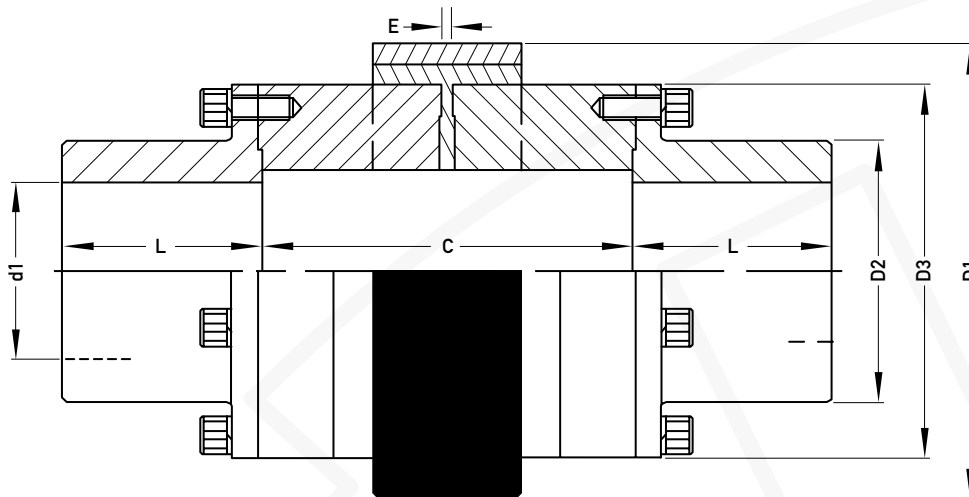

Coupling Size	Maximum KW per 1000 RPM STD Insert	Max Bore (d1)	Max RPM	Dimensions				
				D1	D2	D3	L	C (D.B.S.E)
A2D	26	42	4100	111	60	86	60	100 120 140
A3D	52	60	4100	144	88	116	70	100 120 140 180
A4D	104	80	3600	182	110	150	85	120 140 180
A45D	184	90	3100	202	125	170	95	120 140 180

Note - The Samiflex Drop Out Spacer (Type DO) is interchangeable with many competitive Drop-out couplings - Consult Autogard

SAMIFLEX SPACER COUPLING - TYPE SP

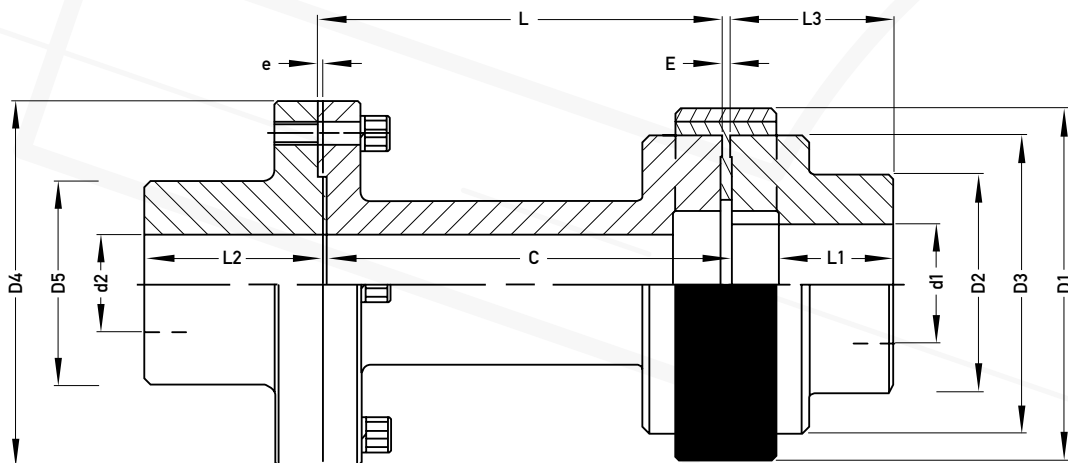

Coupling Size	Max Range		Max RPM	Dimensions								
	d1	d2		D1	D3	D4	D5	L1	L2	L3	e	C (DBSE)
A1-SP	38	42	5500	83	65	100	67	34	45	45	2	100 120 140
A2-SP	42	48	5000	111	86	120	83	47	62	62	2	100 120 140
A3B-SP	55	65	4500	144	116	140	107	56	76	76	2.5	100 120 140
A4B-SP	75	85	3500	182	150	178	140	63	88	88	2.5	120 140 180
A45-SP	75	90	3100	202	170	200	150	70	97	97	2.5	120 140 180
A5B-SP	95	110	2900	225	190	225	179	77	106	106	2.5	140 180 200
A55-SP	95	110	2600	250	215	245	180	90	121	121	3	140 180 200
A6-SP	110	120	2500	265	233	265	198	95	128	128	3	180 200 250
A7-SP	130	130	2200	306	267	290	230	116	153	153	3	200 250 280